


Product APPLICATION Guide

NEW Miniature Speaker Series

Suitable for Consumer, Industrial, Medical & Transportation Applications

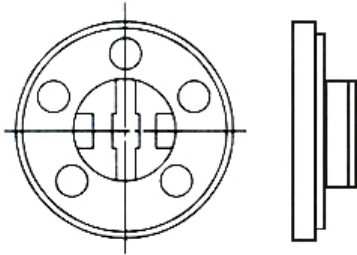

KEY FEATURES:

- Mylar Cone (Water & Fluid Resistant)
- Plastic & Metal Frames Available
- 8 Ohm; 0.25 Watts; RoHS Compliant
- Compact Size; Wide Frequency Response
- Other Diameters Available Upon Request

Speaker Part Number	Impedance (Ohms)	Rated Power (Watts)	Max Power (Watts)	Frequency Range (kHz)	Sound Level (1W 1M)	Frame Material	Size Dia x Hgt (mm)
PSR-13N08A-JQ	8	0.25	0.30	1.8 to 7.0	75	Metal	13 x 5.0
PSR-18N08A-JQ	8	0.25	0.30	1.8 to 4.0	84	Metal	18 x 3.0
PSR-20N08A-JQ	8	0.25	0.30	0.9 to 5.0	80	Metal	20 x 3.0
PSR-28N08A-JQ	8	0.25	0.50	0.7 to 8.0	89	Metal	28 x 4.3
PSR-36N08A-JQ	8	0.25	0.50	0.55 to 7.0	89	Metal	36 x 4.8
PSR-40N08A-JQ	8	0.25	0.50	0.5 to 6.0	87	Metal	40 x 4.8
PSR-40N08A05-JQ	8	0.25	0.50	0.5 to 5.0	89	Metal	40 x 5.0
PSR-45N08A-JQ	8	0.25	0.30	0.4 to 6.0	88	Metal	45 x 4.8
PSR-57N08A01-JQ	8	0.25	1.0	0.6 to 4.0	92	Metal	57 x 7.0
PSR-11N08S-JQ**	8	0.25	0.30	1.6 to 9.0	75	Plastic	11 x 4.5
PSR-20F08S-JQ	8	0.25	0.30	1.3 to 6.0	80	Plastic	20 x 5.0
PSR-23N08S-JQ**	8	0.25	0.30	1.0 to 5.0	83	Plastic	23 x 3.7
PSR-23F08S-JQ	8	0.25	0.30	0.9 to 6.5	81	Plastic	23 x 5.0
PSR-27N08S01-JQ**	8	0.25	0.50	0.75 to 7.0	84	Plastic	27 x 5.0
PSR-29F08S02-JQ	8	0.25	0.50	0.8 to 4.5	84	Plastic	29 x 9.0
PSR-40F08S02-JQ	8	0.25	0.50	0.8 to 5.0	86	Plastic	40 x 7.5
PSR-50F08S-JQ	8	0.25	0.50	0.5 to 5.0	91	Plastic	50 x 10.5
PSR-57F08S02-JQ	8	0.25	0.50	0.35 to 5.0	90	Plastic	57 x 12.5

** Magnet Inside of Plastic Frame